

FUEGO PRO- MODEL: EIR1S

In-ground Luminaires

WAC


PROJECT:

TYPE:

Product Image



Line Drawing

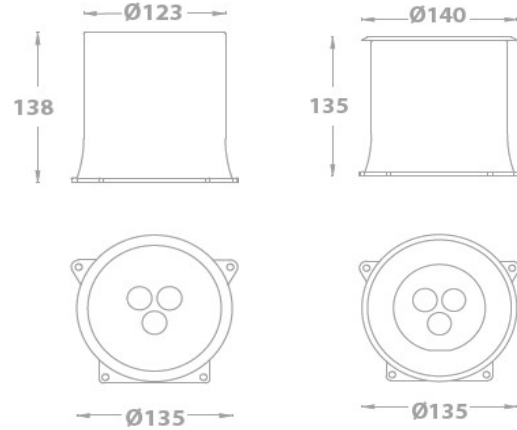

Product Description

The IP67 waterproof design and FUEGO PRO buried lamp are equipped with a patented anti condensation design, featuring symmetrical and asymmetrical wall sweeping and projection light distribution. The unique adjustable device allows for on-site adjustment of the light direction, with an adjustment range of 0 ° to 20 °. There are two types of power supply options available: 24V DC and 220V AC.

Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens
- Finish: Static electricity powder coating
- Adjustable Angle: /
- Accessories: Embedded parts, suction cups, textured glass, honeycomb mesh
- Certification: CCC
- IP Rating: IP67/ IK08 (Load capacity 2000Kg)
- Insulation Level: Class III
- Operating Temperature: -20°C~50°C

Product Specifications

- LED Type: High Power
- Power: 7W(Max)
- Source Lm: 3000K 483lm; 4000K 513lm
- LED Lifetime: >50000h-L70 / B10-Ta25°C(LM-80 / TM-21)
- CCT/CRI: 3000K,Ra80 / 4000K,Ra80
- SDCM: 3 SDCM
- Input: 24V DC or 220V/AC
- Dimming: ON-OFF or DMX512 dimming control
- Net Weight: 0.98Kg without packing

Order Model

Model	Comment	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	CCT	Finish
EIR1S	T Frameless	07 7(Max)	3	356	ET ON-OFF	S 8°	30 3000K	B Black (Frameless only)
					24V/DC Power Supply			
	MT DMX512 Dimming				1 15°			
	24V/DC Power Supply							
F Frame	EL ON-OFF	2 25°	40 4000K	S Stainless Steel (Frame only)				
	220V/AC Power Supply	4 45°						

Example:EIR1ST-07ET-S30-B

FUEGO PRO- MODEL: EIR1S










In-ground Luminaires




PROJECT:

TYPE:


Accessory

ROUND	EMBEDEDE PART		SUCTION CUP	BEAM ELONGATOR	HONEYCOMB
Model	EIR1S Series		EIR1NT-SC001	EIR1ST-BEL001	EIR1ST-HCL001
EIR1ST	EIR1ST-RC001	EIR1ST-RC002			
					
EIR1SF	EIR1SF-RC001	EIR1SF-RC002			
					


LIGHT distribution@3000K LUMINAIRE daTA

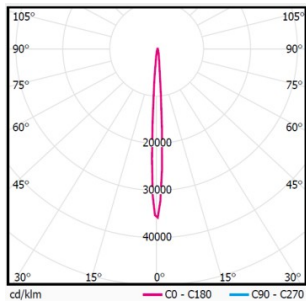


MODEL: EIR1ST-07EL-S30-B
BEAMANGLE: 8°
POWER: 9.1W
LUMENS: 394lm
CBCP: /
EFFICACY: 43lm/W

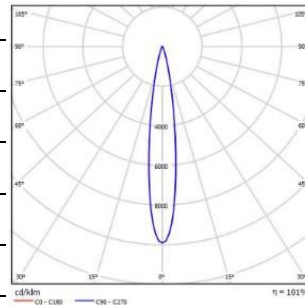

MODEL: EIR1ST-07EL-130-B
BEAMANGLE: 15°
POWER: 9.2W
LUMENS: 360lm
CBCP: /
EFFICACY: 39lm/W

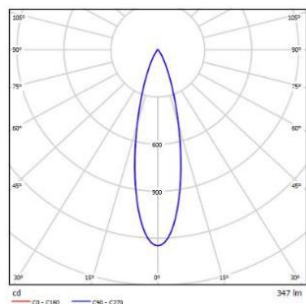

MODEL: EIR1ST-07EL-230-B
BEAMANGLE: 25°
POWER: 8.7W
LUMENS: 347lm
CBCP: /
EFFICACY: 40lm/W

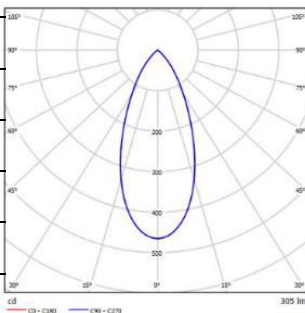

MODEL: EIR1ST-07EL-430-B
BEAMANGLE: 45°
POWER: 8.7W
LUMENS: 305lm
CBCP: /
EFFICACY: 35lm/W