

LIGNE II - MODEL: OC5512


Linear Luminaires

WAC


PROJECT:

TYPE:

Product Image

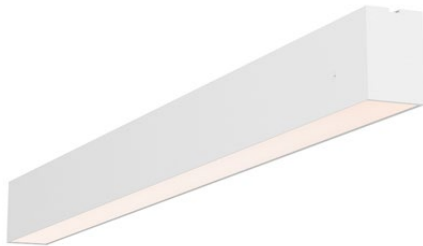

Line Drawing

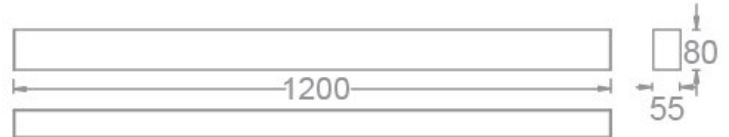

Product Description

LIGNE II surface mounted linear lamp, using aluminum profile lamp body, has a simple and beautiful appearance, using LED light source, has good heat dissipation, high efficiency and energy saving, good anti-glare, can be assembled from head to tail, and can be customized in length. Suitable for lighting applications in commercial and office spaces.

Product Features

- Body Material: Aluminum profile fixture body
- Optical System: Lens
- Finish: Electrostatic powder coating,
- Projection direction: /
- Accessories: /
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C
- Product weight: About 2.87kg, excluding packaging

Product Specifications

- Shielding angle: /
- LED Type: SMD LED
- Light power: 35W
- Source Lm: 4000K:4380lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/4000K/5000K/Ra90
- SDCM: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: ON-OFF/0-10V (It is necessary to conduct matching testing with the project site system in advance)

Order Model

Model	Length (mm)	Power (W)	Driver	Beam	CCT	Finish
OC55	12 1200	35 35W	E ON-OFF D 0-10V Dimming	P (PC Smooth cover)	30 3000K	WT White
				Y (PC knurling cover)	40 4000K	
					50 5000K	

Example: OC5512-35E-P30WT

LIGNE II - MODEL: OC5512




Linear Luminaires

WAC


PROJECT:

TYPE:

Accessories

Part Number	Description	Picture
OP5512S-L	L-shaped splices	
OP5512S-T	T-shaped splices	
OP5512S-X	+ shaped splices	

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



MODEL:	OC5512-35E-P30WT
BEAM ANGLE:	/
POWER:	36W
LUMENS:	3060 lm
CBCP:	/
EFFICACY:	85 lm/W

LIGNE II - MODEL: OC5512

Linear Luminaires

WAC


PROJECT:

TYPE:

Product Image



Line Drawing



Product Description

LIGNE II surface mounted linear lamp, using aluminum profile lamp body, has a simple and beautiful appearance, anti-glare grille, using LED light source, has good heat dissipation, high efficiency and energy saving, good anti-glare, can be assembled from head to tail, and can be customized in length. Suitable for lighting applications in commercial and office spaces.

Product Features

- Body Material: Aluminum profile fixture body
- Optical System: Lens+anti glare grille
- Finish: Electrostatic powder coating,
- Projection direction /
- Accessories: /
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C
- Product weight: About 3.05kg, excluding packaging

Product Specifications

- Shielding angle: 38°
- LED Type: SMD LED
- Light power: 35W
- Source Lm: 4000K:4380lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/4000K/5000K/Ra90
- SDCM: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: ON-OFF/0-10V (It is necessary to conduct matching testing with the project site system in advance)

Order Model

Model	Length (mm)	Power (W)	Driver	Beam	CCT	Finish
OC55	12 1205	35 35W	E ON-OFF D 0-10V Dimming	2 24°	30 3000K	WT White
				3 36°	40 4000K	
				4 45°	50 5000K	

Example: OC5512-35E-230WT

LIGNE II - MODEL: OC5512


Linear Luminaires

WAC

PROJECT:

TYPE:

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



MODEL:	OC5512-35E-330WT
BEAM ANGLE:	/
POWER:	36W
LUMENS:	2646 lm
CBCP:	/
EFFICACY:	73.5 lm/W