

LIGNE II - MODEL: OR5512
LINEAR LUMINAIRES

WAC


PROJECT:

TYPE:

Product Image



Line Drawing

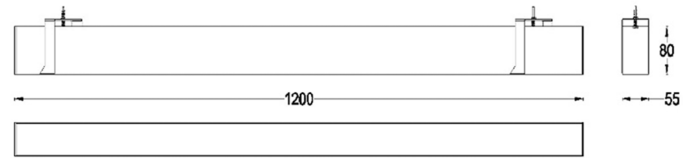

Product Description

LIGNE II embedded linear lamp, using aluminum profile lamp body, has a simple and beautiful appearance, using LED light source, has good heat dissipation, high efficiency and energy saving, good anti glare, can be spliced from head to tail, and can be customized in length. Suitable for lighting applications in commercial and office spaces.

Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens
- Finish: Static electricity powder coating
- Adjustable Angle: /
- Accessories: /
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C

Product Specifications

- Shielding Angle: /
- Cut-out: 61mm*1206mm
- LED Type: SMD LED
- Source Lm: 4000K 4380lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/ 4000K/5000K/Ra90
- SDCM: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: ON-OFF/0-10V
- Net Weight: 2.87Kg, without packing

Order Model

Model	Length (mm)	Power (W)	Driver	Beam	CCT	Finish
OR55	12 1200	35 35W	E N-OFF D 0-10V Dimming	P (PC smooth)	30 3000K	WT White
				Y (PC nurling)	40 4000K	
					50 5000K	

Example: OR5512-35E-P30WT




LIGNE II - MODEL: OR5512
LINEAR LUMINAIRES




PROJECT:

TYPE:

Accessories

model	Specifications	Image
OP5512S-L	L-shaped splices	
OP5512S-T	T-shaped splices	
OP5512S-X	cross-shaped splices	

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



MODEL :	OR5512-35E-P30WT
BEAM ANGLE :	/
POWER :	36W
LUMENS :	3060 lm
CBCP :	/
EFFICACY :	85 lm/W

WAC Lighting
 www.waclighting.com (US)
 www.waclighting.com.cn (China)

Headquarters
 44 Harbor Park Drive • Port Washington, NY
 Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
 14,Lane 299, Bi Sheng Road, Shanghai 201204,China
 Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting reserves the right to periodically design and update products. 2024-03-07

LIGNE II - MODEL: OR5512
LINEAR LUMINAIRES

WAC


PROJECT:

TYPE:

Product Image



Line Drawing

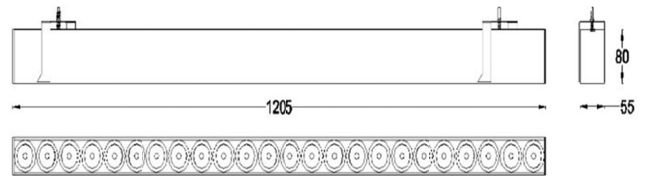

Product Description

LIGNE II embedded linear lamp, using aluminum profile lamp body, has a simple and beautiful appearance, using LED light source, has good heat dissipation, high efficiency and energy saving, good anti glare, can be spliced from head to tail, and can be customized in length. Suitable for lighting applications in commercial and office spaces.

Product Features

- Body Material:: Aluminum alloy die-casting
- Optical System: Lens
- Finish: Static electricity powder coating
- Adjustable Angle: /
- Accessories: /
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C

Product Features

- Shielding Angle 38°
- Cut-out: 61mm*1211mm
- LED Type: SMD LED
- Source Lm: 4000K 4380lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/ 4000K/5000K/Ra90
- SDCM: 3 SDCM
- Input: 220V~240 V AC / 50Hz
- Dimming: ON-OFF/ 0-10V
- Net Weight: 3.05Kg, without packing

Order Model

Model	Length (mm)	Power (W)	Driver	Beam	CCT	Finish
OR55	12 1205	35 35W	E ON-OFF D 0-10V Dimming	2 24°	30 3000K	WT White
				3 36°	40 4000K	
				4 45°	50 5000K	

Example: OR5512-35E-230WT

Accessories

WAC Lighting
 www.waclighting.com (US)
 www.waclighting.com.cn (China)

Headquarters
 44 Harbor Park Drive • Port Washington, NY
 Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
 14,Lane 299, Bi Sheng Road, Shanghai 201204,China
 Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting reserves the right to periodically design and update products.2024-03-07

LIGNE II - MODEL: OR5512

LINEAR LUMINAIRES


WAC

PROJECT:

TYPE:

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

Luminous emittance 1 / Polar LDC



MODEL :	OR5512-35E-330WT
BEAM	_____
ANGLE :	/
POWER :	36W
LUMENS :	2646 lm
CBCP :	/
EFFICACY :	73.5 lm/W