


PROJECT:

LIGHT POSITION NUMBER:

**Product Picture**



**Line Drawing**

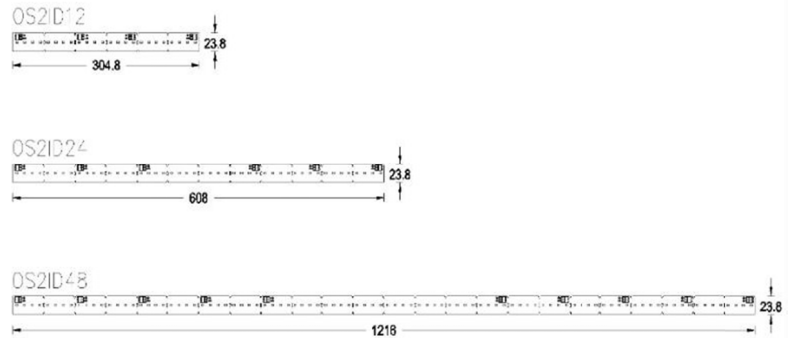

**Product Description**

VENTRIX series low-voltage linear lamps, suitable for WAC VENTRIX track system, lamps are smart and small; Excellent light, splicing no dark area; To meet the needs of different application environments, widely used in office, commercial and other lighting space places.

**Product Features**

- Body Material: Printed aluminum substrate
- Optical System: Lens
- Finish: /
- Projection direction: /
- Accessories/Brackets: See the attachment
- Certification: CQC
- IP Rating: IP20
- Insulation Level: Class III
- Operating Temperature: -20°C~40°C

**Product Specifications**

- Shading Angle: /
- LED Type: SMD
- Lamp Flux: 4000K 1000lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CRI: 2700K/3000K/3500K/4000K,Ra90
- SDCM: 3 SDCM
- Input: 48V DC
- Dimming: ON-OFF/0-10V/ELV/DMX512/Wireless and APP control
- Net Weight: 0.04Kg(6W-12W),0.08Kg(12W-24W),0.16Kg(24W-48W) without packing

**VENTRIX - MODEL: OS2ID**  
Indirect Luminaires(48V)

PROJECT:


LIGHT POSITION NUMBER:

**Order Model**



Model	Power(W)	Max Lumens	CCT	CRI
OS2ID12	1 6W	460	F927 2700K F930 3000K F935 3500K F940 4000K	90
	2 9W	680		
	3 12W	910		
OS2ID24	1 12W	910		
	2 18W	1360		
	3 24W	1820		
OS2ID48	1 24W	1820		
	2 36W	2730		
	3 48W	3650		

Example: OS2ID12-1-F927

**Electrical appliances (Don't leave out your order)**

Model	Max Power		Pic
OS2ID-DR96	96W	4.8M(20W/M) 3.0M(32W/M) 2.4M(40W/M)	

**Accessories**

Model	Description	Pic
LENS-S2ID96-BW	VENTRIX Batwing	
LENS-S2ID96-CL	VENTRIX Clear	
LENS-S2ID96-FR	VENTRIX Frosted	