
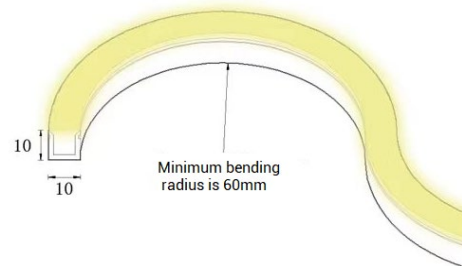


PROJECT:

TYPE:

Product Image

Line Drawing

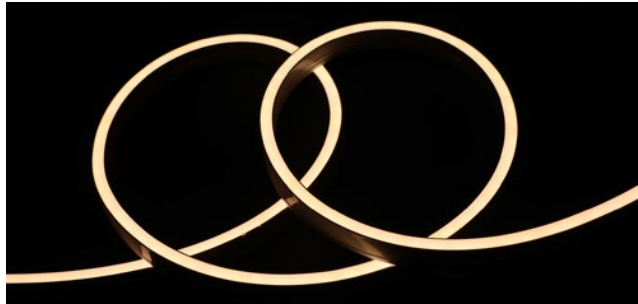

Product Description

The 10 * 10 mm side bend neon light strip adopts a special process of integrated extrusion, ensuring continuous and uniform light output without any spots. The integrated end is injection molded and supports seamless splicing without dark areas. There are two specifications, IP65 and IP67, Widely used in indoor and outdoor contouring and shaping.

Product Features

- Body Material: Integrated extruded silicone lamp body, high-quality FPCB lamp board
- Optical System: Silicone microstructure
- Accessories: Installation accessories can be ordered separately
- Certification: CQC
- IP Rating: IP65(Bare wires at both ends)
IP67(Waterproof joints at both ends)
- Insulation Level: Class III
- Operating Temperature: -20°C~40°C

Product Specifications

- LED Type: SMD
- Light power: 690lm@6w/m, 1150lm@10W/m
- LED Lifetime: >36000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K,3000K,3500K,4000K,5000K/Ra90
- Input: 24V DC
- SDCM: 3 SDCM
- Bending radius: 60mm (minimum)
- Dimming: ON-OFF (Whole segment control)
- Product weight: About 0.3kg/m, excluding packaging

Order Model

Model	LED	Length	Size	Dimming	CCT	Power Feed Type	IP	Finish
FLSV V-series side bend neon light strip	06 6W/m 10 10W/m	10 1m	A 10*10mm	E ON-OFF (Whole segment control)	27 2700K	S Side B Bottom F Front	5 IP65 7 IP67	WT White
		20 2m			30 3000K			
		30 3m			35 3500K			
		40 4m			40 4000K			
		50 5m			50 5000K			

Example: FLSV-0610A-E30S5WT

NOTE: The length can be provided in units of 0.1 meters, for example: FLSV-0615A-E30S5WT ("15" represents 1.5 meters)

NEON - MODEL: FLSV



Linear Luminaires

WAC

PROJECT:

TYPE:

Accessories

Part Number	Description	Picture
FLSH-A-AC	H-series 10 * 10mm Special Card * Default 1M comes with 3pcs of cards	
FLSH-A-CH	H-series 10 * 10mm dedicated fixed track length 965mm * Optional, needs to be ordered separately	

NEON - MODEL: FLSV
Linear Luminaires




PROJECT:

TYPE:

Product Image

Line Drawing

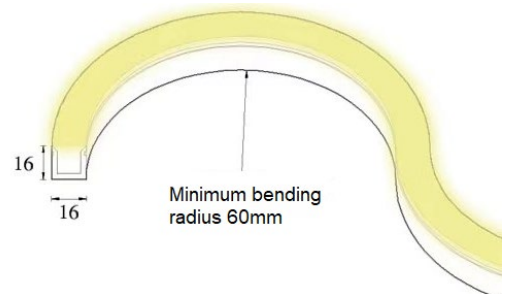

Product Description

The 16 * 16 mm side bend neon light strip adopts a special process of integrated extrusion, there are monochrome and RGBW versions available, ensuring continuous and uniform light output without any spots. The integrated end is injection molded and supports seamless splicing without dark areas. There are two specifications, IP65 and IP67, Widely used in indoor and outdoor contouring and shaping.

Product Features

- Body Material: Integrated extruded silicone lamp body, high-quality FPCB lamp board
- Optical System: Silicone microstructure
- Accessories: Installation accessories can be ordered separately
- Certification: CQC
- IP Rating: IP65(Bare wires at both ends)
IP67(Waterproof joints at both ends)
- Insulation Level: Class III
- Operating Temperature: -20°C~40°C

Product Specifications

- LED Type: SMD
- Light power: 1610lm@14w/m, 2070lm@18W/m
- LED Lifetime: >36000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K,3000K,3500K,4000K,5000K/Ra90
RGBW(W:2700K,3000K,4000K,5000K)
- Input: 24V DC
- SDCM: 3 SDCM
- Bending radius: 60mm (minimum)
- Dimming: ON-OFF (Whole segment control)
DMX512 8 segments per meter
- Product weight: About 0.6kg/m, excluding packaging

Order Model

Model	LED	Length	Size	Dimming	CCT	Power Feed Type	IP	Finish
FLSV V-series side bend neon light strip	14 14W/m 18 18W/m	10 1m	B 16*16mm	E ON-OFF (Whole segment control) M DMX512 8 segments per meter	27 2700K	S Side B Bottom F Front	5 IP65 7 IP67	WT White
		20 2m			30 3000K			
		30 3m			35 3500K			
		40 4m			40 4000K			
		50 5m			50 5000K			
					F2 RGBW(2700K)			
					F3 RGBW(3000K)			
					F4 RGBW(4000K)			
					F5 RGBW(5000K)			

NEON - MODEL: FLSV

Linear Luminaires





PROJECT:

TYPE:

Example: FLSV-1410B-E30S5WT

NOTE: The length can be provided in units of 0.1 meters, for example: FLSV-1415B-E30S5WT ("15" represents 1.5 meters)

Accessories

Part Number	Description	Picture
FLSH-B-AC	H-series 16 * 16mm Special Card * Default 1M comes with 3pcs of cards	
FLSH-B-CH	H-series 16 * 16mm dedicated fixed track length 965mm * Optional, needs to be ordered separately	

NEON - MODEL: FLSV


Linear Luminaires




PROJECT:

TYPE:

Product Image

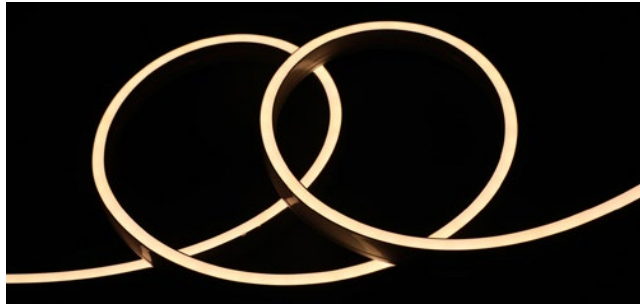

Line Drawing

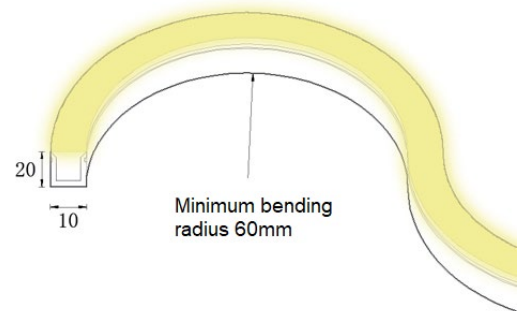

Product Description

The 10 * 20 mm side bend neon light strip adopts a special process of integrated extrusion, there are monochrome and RGBW versions available, ensuring continuous and uniform light output without any spots. The integrated end is injection molded and supports seamless splicing without dark areas. There are two specifications, IP65 and IP67, Widely used in indoor and outdoor contouring and shaping.

Product Features

- Body Material: Integrated extruded silicone lamp body, high-quality FPCB lamp board
- Optical System: Silicone microstructure
- Accessories: Installation accessories can be ordered separately
- Certification: CQC
- IP Rating: IP65(Bare wires at both ends)
IP67(Waterproof joints at both ends)
- Insulation Level: Class III
- Operating Temperature: -20°C~40°C

Product Specifications

- LED Type: SMD
- Light power: 1610lm@14w/m, 2070lm@18W/m
- LED Lifetime: >36000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K,3000K,3500K,4000K,5000K/Ra90
RGBW(W:2700K,3000K,4000K,5000K)
- Input: 24V DC
- SDCM: 3 SDCM
- Bending radius: 60mm (minimum)
- Dimming: ON-OFF (Whole segment control)
DMX512 8 segments per meter
- Product weight: About 0.57kg/m, excluding packaging

Order Model

Model	LED	Length	Size	Dimming	CCT	Power Feed Type	IP	Finish
FLSV V-series side bend neon light strip	14 14W/m 18 18W/m	10 1m	C 10*20mm	E ON-OFF (Whole segment control) M DMX512 8 segments per meter	27 2700K	S Side B Bottom F Front	5 IP65 7 IP67	WT White
		20 2m			30 3000K			
		30 3m			35 3500K			
		40 4m			40 4000K			
		50 5m			50 5000K			
					F2 RGBW(2700K) F3 RGBW(3000K) F4 RGBW(4000K) F5 RGBW(5000K)			

NEON - MODEL: FLSV

Linear Luminaires



PROJECT:

TYPE:

Example: FLSV-1410C-E30S5WT

NOTE: The length can be provided in units of 0.1 meters, for example: FLSV-1415C-E30S5WT ("15" represents 1.5 meters)

Accessories

Part Number	Description	Picture
FLSH-C-AC	V-series 10 * 20mm Special Card * Default 1M comes with 3pcs of cards	
FLSH-C-CH	V-series 10 * 20mm dedicated fixed track length 965mm * Optional, needs to be ordered separately	