

LIGNE PRO - MODEL:OR175AT-06

Linear Luminaires

WAC


PROJECT:

Light position number:

Product Image



Line Drawing

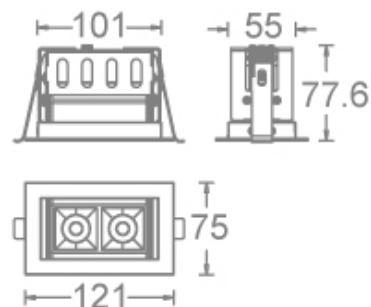

Product Description

LIGNE PRO Embedded linear downlighting lamps, using aluminum profile lamp body, appearance simple atmosphere beautiful. Use LED light source, high light efficiency, high display. Using the original SUBROSA anti-glare design, deep anti-glare, with a variety of light distribution, +/-35° Angle adjustable. Mainly suitable for public space, commercial, office, display lighting and other lighting applications.

Product Features

- Body Material: Aluminum alloy die-casting lamp body
- Optical System: Lens + SUBROSA hidden light system
- Finish: Electrostatic powder spraying
- Projection direction: +/-35° adjustable
- Accessories/Brackets: /
- Safety certification: CCC
- IP Rating: IP20
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C

Product Specifications

- Opening size: Ø103mm*59mm
- Ceiling thickness: 5-25mm
- Shading Angle: 40°
- Light source type: High Power LED
- Source Lm: 2700K 726lm; 3000K 750lm; 3500K 780lm; 4000K 810lm
- LED Lifetime: >50000h-L70 /B10-Ta25 °C (LM-80/TM-21)
- CCT/CRI: 2700K/3000K/3500K/4000K, Ra90
- SDCM: 3SDCM
- Input voltage: 220V~240V AC/50Hz
- Dimming: ON-OFF/0-10V (The match test with the project site system must be done in advance)
- Net Weight: 0.55Kg without packing

Order Model

Model	Comment	Power (W)	Driver	Beam	CCT	Reflector	Finish
OR175 R Recessed mounting 1 Series 75 Width	AT Adjustable Trim	06 6W	E ON-OFF D 0-10V Dimming	1 16°	27 2700K	B Black	WT White BK Black
				3 36°	30 3000K	S Specular	
				4 46°	35 3500K	G Gold	
					40 4000K	H Haze	

Example : OR175AT-06E-140BWT

Attachment

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14, Lane 299, Bi Sheng Road, Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting reserves the right to periodically design and update products. 2023-01-04

LIGNE PRO - MODEL:OR175AT-06


Linear Luminaires

WAC


PROJECT:

Light position number:


LIGHT DISTRIBUTION@4000K LUMINAIRE DATA



MODEL: OR175AT-06E-140BWT
BEAM ANGLE: 16°
POWER: 6.9W
LUMENS: 612lm
CBCP: 2865
EFFICACY: 89lm/W



MODEL: OR175AT-06E-340BWT
BEAM ANGLE: 36°
POWER: 6.8W
LUMENS: 612lm
CBCP: 1419
EFFICACY: 90lm/W



MODEL: OR175AT-06E-440BWT
BEAM ANGLE: 46°
POWER: 6.8W
LUMENS: 612lm
CBCP: 1039
EFFICACY: 90lm/W

LIGNE PRO - MODEL:OR175AT-11

Linear Luminaires




PROJECT:

Light position number:

Product Image



Line Drawing

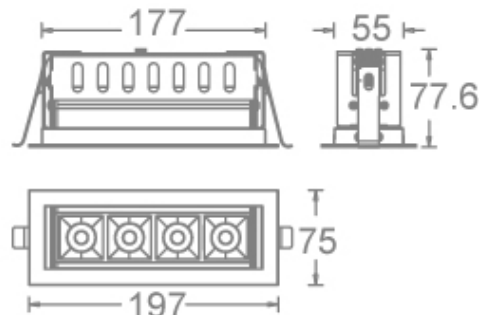

Product Description

LIGNE PRO Embedded linear downlighting lamps, using aluminum profile lamp body, appearance simple atmosphere beautiful. Use LED light source, high light efficiency, high display. Using the original SUBROSA anti-glare design, deep anti-glare, with a variety of light distribution, +/-35° Angle adjustable. Mainly suitable for public space, commercial, office, display lighting and other lighting applications.

Product Features

- Body Material: Aluminum alloy die-casting lamp body
- Optical System: Lens + SUBROSA hidden light system
- Finish: Electrostatic powder spraying
- Projection direction: +/-35° adjustable
- Accessories/Brackets: /
- Safety certification: CCC
- IP Rating: IP20
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C

Product Specifications

- Opening size: Ø103mm*59mm
- Ceiling thickness: 5-25mm
- Shading Angle: 40°
- Light source type: High Power LED
- Source Lm: 2700K 1331lm; 3000K 13750lm; 3500K 14300lm ; 4000K 1485lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C (LM-80/TM-21)
- CCT/CRI: 2700K/3000K/3500K/4000K, Ra90
- SDCM: 3SDCM
- Input voltage: 220V~240V AC/50Hz
- Dimming: ON-OFF/0-10V (The match test with the project site system must be done in advance)
- Net Weight: 0.79Kg without packing

Order Model

Model	Comment	Power (W)	Driver	Beam	CCT	Reflector	Finish
OR175	AT Adjustable Trim	11 11W	E ON-OFF	1 16°	27 2700K	B Black	WT White
R Recessed mounting			D 0-10V Dimming	3 36°	30 3000K	S Specular	BK Black
1 Series				4 46°	35 3500K	G Gold	
75 Width					40 4000K	H Haze	

Example: OR175AT-11E-140BWT

Attachment

LIGNE PRO - MODEL:OR175AT-11

Linear Luminaires


WAC

PROJECT:

Light position number:

LIGHT DISTRIBUTION@4000K LUMINAIRE DATA

配光资料 1 / 配光曲线 (极坐标)



MODEL: OR175AT-06E-140BWT

BEAM ANGLE: 16°


POWER: 11.9W

LUMENS: 1227lm

CBCP: 5950

EFFICACY: 103lm/W

配光资料 1 / 配光曲线 (极坐标)



MODEL: OR175AT-11E-340BWT

BEAM ANGLE: 36°


POWER: 11.9W

LUMENS: 1231lm

CBCP: 2848

EFFICACY: 104lm/W

配光资料 1 / 配光曲线 (极坐标)



MODEL: OR175AT-11E-440BWT

BEAM ANGLE: 46°

POWER: 11.9W

LUMENS: 1240lm

CBCP: 2094

EFFICACY: 105lm/W

LIGNE PRO - MODEL:OR175AT-22

Linear Luminaires

WAC


PROJECT:

Light position number:

Product Image



Line Drawing

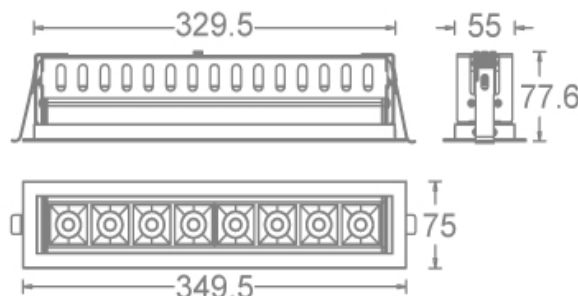

Product Description

LIGNE PRO Embedded linear downlighting lamps, using aluminum profile lamp body, appearance simple atmosphere beautiful. Use LED light source, high light efficiency, high display. Using the original SUBROSA anti-glare design, deep anti-glare, with a variety of light distribution, +/-35° Angle adjustable. Mainly suitable for public space, commercial, office, display lighting and other lighting applications.

Product Features

- Body Material: Aluminum alloy die-casting lamp body
- Optical System: Lens +SUBROSA hidden light system
- Finish: Electrostatic powder spraying
- Projection direction: +/-35° adjustable
- Accessories/Brackets: /
- Safety certification: CCC
- IP Rating: IP20
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C

Product Specifications

- Opening size: Ø332mm*59mm
- Ceiling thickness: 5-25mm
- Shading Angle: 40°
- Light source type: High Power LED
- Source Lm: 2700K 2662lm; 3000K 2750lm; 3500K 2860lm; 4000K 2970lm
- LED Lifetime: >50000h-L70 /B10-Ta25 °C (LM-80/TM-21)
- CCT/CRI: 2700K/3000K/3500K/4000K, Ra90
- SDCM: 3SDCM
- Input voltage: 220V~240V AC/50Hz
- Dimming: ON-OFF/0-10V (The match test with the project site system must be done in advance)
- Net Weight: 1.24Kg without packing

Order Model

Model	Comment	Power (W)	Driver	Beam	CCT	Reflector	Finish
OR175 R Recessed mounting 1 Series 75 Width	AT Adjustable Trim	22 22W	E ON-OFF D 0-10V Dimming	1 16°	27 2700K	B Black	WT White
				3 36°	30 3000K	S Specular	BK Black
				4 46°	35 3500K	G Gold	
					40 4000K	H Haze	

Example : OR175AT-22E-140BWT

Attachment

LIGNE PRO - MODEL:OR175AT-22


Linear Luminaires

WAC


PROJECT:

Light position number:


LIGHT DISTRIBUTION@4000K LUMINAIRE DATA



MODEL:	OR175AT-22E-140BWT
BEAM ANGLE:	16°
POWER:	23.9W
LUMENS:	2418lm
CBCP:	11825
EFFICACY:	101lm/W



MODEL:	OR175AT-22E-340BWT
BEAM ANGLE:	36°
POWER:	23.8W
LUMENS:	2395lm
CBCP:	6016
EFFICACY:	101lm/W



MODEL:	OR175AT-22E-440BWT
BEAM ANGLE:	46°
POWER:	23.7W
LUMENS:	2414lm
CBCP:	4450
EFFICACY:	102lm/W

LIGNE PRO - MODEL:OR175AT-32

Linear Luminaires

WAC


PROJECT:

Light position number:

Product Image



Line Drawing

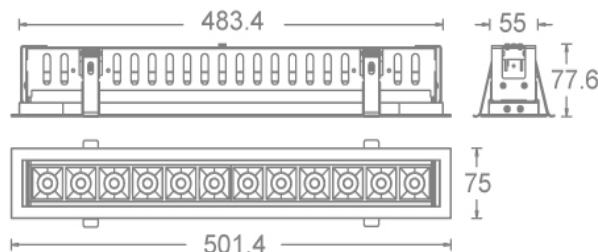

Product Description

LIGNE PRO Embedded linear downlighting lamps, using aluminum profile lamp body, appearance simple atmosphere beautiful. Use LED light source, high light efficiency, high display. Using the original SUBROSA anti-glare design, deep anti-glare, with a variety of light distribution, +/-35° Angle adjustable. Mainly suitable for public space, commercial, office, display lighting and other lighting applications.

Product Features

- Body Material: Aluminum alloy die-casting lamp body
- Optical System: Lens +SUBROSA hidden light system
- Finish: Electrostatic powder spraying
- Projection direction: +/-35° adjustable
- Accessories/Brackets: /
- Safety certification: CCC
- IP Rating: IP20
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C

Product Specifications

- Opening size: Ø486mm*59mm
- Ceiling thickness: 5-25mm
- Shading Angle: 40°
- Light source type: High Power LED
- Source Lm: 2700K 3872lm; 3000K 4000lm; 3500K 4160lm ; 4000K 4320lm
- LED Lifetime: >50000h-L70 /B10-Ta25 °C (LM-80/TM-21)
- CCT/CRI: 2700K/3000K/3500K/4000K, Ra90
- SDCM: 3SDCM
- Input voltage: 220V~240V AC/50Hz
- Dimming: ON-OFF/0-10V (The match test with the project site system must be done in advance)
- Net Weight: 1.9Kg without packing

Order Model

Model	Comment	Power (W)	Driver	Beam	CCT	Reflector	Finish
OR175 R Recessed mounting 1 Series 75 Width	AT Adjustable Trim	32 32W	E ON-OFF D 0-10V Dimming	1 16°	27 2700K	B Black	WT White
				3 36°	30 3000K	S Specular	BK Black
				4 46°	35 3500K	G Gold	
					40 4000K	H Haze	

Example: OR175AT-32E-140BWT

Attachment

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting reserves the right to periodically design and update products.2023-01-04

LIGNE PRO - MODEL:OR175AT-32

Linear Luminaires


WAC

PROJECT:

Light position number:

LIGHT DISTRIBUTION@4000K LUMINAIRE DATA

配光资料 1 / 配光曲线 (极坐标)



MODEL: **OR175AT-32E-140BWT**

BEAM ANGLE: **16°**


POWER: **35.6W**

LUMENS: **3706lm**

CBCP: **16833**

EFFICACY: **104lm/W**

配光资料 1 / 配光曲线 (极坐标)



MODEL: **OR175AT-32E-340BWT**

BEAM ANGLE: **36°**


POWER: **35.5W**

LUMENS: **3723lm**

CBCP: **8520**

EFFICACY: **105lm/W**

配光资料 1 / 配光曲线 (极坐标)



MODEL: **OR175AT-32E-440BWT**

BEAM ANGLE: **46°**

POWER: **35.7W**

LUMENS: **3737lm**

CBCP: **6452**

EFFICACY: **105lm/W**