


ULTRA – MODEL:SLN36
Ceiling Mount Luminaires




PROJECT:

TYPE:

Product Image



Line Drawing

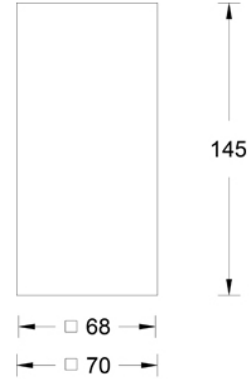

Product Description

ULTRA series LED square exposed tube lamp adopts a modular design, and the on-site lamps can be freely disassembled and replaced with reflectors and lamp bodies, thereby achieving free switching of various specifications and lighting methods. In terms of optics, a brand new hidden light technology is adopted, which has good anti glare performance and color consistency control, and has a comfortable lighting effect. It is mainly suitable for indoor places such as hotels, villas, and commercial spaces.

Product Features

- Body Material: Aluminum alloy die-casting lamp body
- Optical System: Lens +Anti-glare reflector
- Finish: Electrostatic powder coating
- Projection direction: /
- Accessories: See accessory list
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C
- Product weight: About 0.36kg, excluding packaging
- Shielding angle: 35°

Product Specifications

- LED Type: COB
- Source Lm:
 - 2700K: 8W 682lm; 7W 758lm; 10W 1080lm; 13W 1404lm
 - 3000K: 8W 720lm; 7W 800lm; 10W 1150lm; 13W 1495lm
 - 3500K: 8W 752lm; 7W 835lm; 10W 1195lm; 13W 1554lm
 - 4000K: 8W 765lm; 7W 850lm; 10W 1210lm; 13W 1573lm
 - 5000K: 8W 774lm; 7W 860lm; 10W 1220lm; 13W 1586lm
- LED Lifetime: >36000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K/3000K/3500K/4000K/5000K, CRI≥Ra90
- Input: 220V AC / 50Hz
- Dimming: No dimming/0-10V(Matching testing needs to be done in advance)

Order Model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish
SLN Surface Mounted Downlight N series	3 3"	6 Rectangular Trimless	LM08 COB 8W	E On-Off D 0-10V Dimming	S 8°	27 2700K	B Black S Specular	WT White BK Black
			LM07 COB 7W		N 13°	30 3000K		
			LM10 COB 10W		1 18°	35 3500K		
			LM13 COB 13W		2 28°	40 4000K		
					3 36°	50 5000K		
				5 50°				

Example: SLN36-LM07E-N30SWT

NOTE: 8°, 13° and 18° factory default with honeycomb grille.





ULTRA – MODEL:SLN36
Ceiling Mount Luminaires



PROJECT:


TYPE:

Accessories


Part Number	Description	Picture
LENS-11-BEL	Striped glass lenses	
LENS-11-BSL-ULTRA	Soft glass lenses	
LENS-11-FR	Frosted glass lenses	
LENS-11-HCL-ULTRA	Borderless honeycomb grille	

NOTE: Each lamp can be equipped with at most one optical accessory; 8°、13° and 18° factory default with honeycomb grille.


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA




MODEL: SLN36-LM07E-N30SWT
BEAM ANGLE: 13°
POWER: 9W
LUMENS: 466 lm
CBCP: 5571 cd
EFFICACY: 52 lm/W




MODEL: SLN36-LM10E-N30SWT
BEAM ANGLE: 13°
POWER: 11W
LUMENS: 520 lm
CBCP: 6220 cd
EFFICACY: 47 lm/W




MODEL: SLN36-LM13E-N30SWT
BEAM ANGLE: 13°
POWER: 16W
LUMENS: 676 lm
CBCP: 8086 cd
EFFICACY: 42 lm/W



MODEL: SLN36-LM07E-130SWT
BEAM ANGLE: 18°
POWER: 9W
LUMENS: 721 lm
CBCP: 5316 cd
EFFICACY: 80 lm/W



MODEL: SLN36-LM10E-130SWT
BEAM ANGLE: 18°
POWER: 11W
LUMENS: 817 lm
CBCP: 6028 cd
EFFICACY: 74 lm/W




MODEL: SLN36-LM13E-130SWT
BEAM ANGLE: 18°
POWER: 16W
LUMENS: 1062 lm
CBCP: 7836 cd
EFFICACY: 66 lm/W

ULTRA – MODEL:SLN36
Ceiling Mount Luminaires




PROJECT:


TYPE:




MODEL: SLN36-LM07E-230SWT
BEAM ANGLE: 28°
POWER: 15W
LUMENS: 1035 lm
CBCP: 4511 cd
EFFICACY: 69 lm/W




MODEL: SLN36-LM07E-330SWT
BEAM ANGLE: 36°
POWER: 9W
LUMENS: 643 lm
CBCP: 1497 cd
EFFICACY: 71 lm/W




MODEL: SLN36-LM13E-230SWT
BEAM ANGLE: 13°
POWER: 16W
LUMENS: 676 lm
CBCP: 8086 cd
EFFICACY: 52 lm/W




MODEL: SLN36-LM10E-N30SWT
BEAM ANGLE: 18°
POWER: 9W
LUMENS: 721 lm
CBCP: 5316 cd
EFFICACY: 47 lm/W




MODEL: SLN36-LM10E-330SWT
BEAM ANGLE: 36°
POWER: 11W
LUMENS: 804 lm
CBCP: 1857 cd
EFFICACY: 73 lm/W




MODEL: SLN36-LM13E-330SWT
BEAM ANGLE: 36°
POWER: 15W
LUMENS: 1024 lm
CBCP: 2375 cd
EFFICACY: 68 lm/W




MODEL: SLN36-LM07E-530SWT
BEAM ANGLE: 50°
POWER: 9W
LUMENS: 425 lm
CBCP: 574 cd
EFFICACY: 47 lm/W



MODEL: SLN36-LM10E-530SWT
BEAM ANGLE: 50°
POWER: 11W
LUMENS: 532 lm
CBCP: 717 cd
EFFICACY: 48 lm/W



MODEL: SLN36-LM13E-530SWT
BEAM ANGLE: 50°
POWER: 15W
LUMENS: 677 lm
CBCP: 914 cd
EFFICACY: 45 lm/W



MODEL: SLN36-LM08E-S30SWT
BEAM ANGLE: 8°
POWER: 10W
LUMENS: 375 lm
CBCP: 9280 cd
EFFICACY: 38 lm/W