

SWALLOW II - MODEL: TL25SLD

W Track Luminaires




PROJECT:

TYPE:

Product Image



Line Drawing

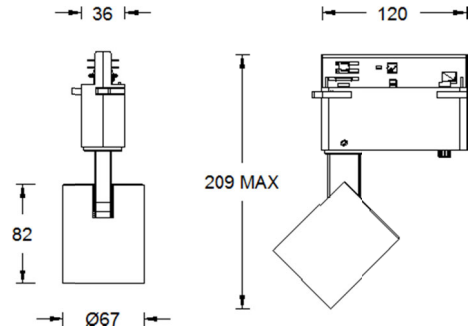

Product Description

Swallow II series LED track spotlights, suitable for W three-loop track, exquisite design, made of aluminum alloy die-cast lamp body, no visible radiator, built-in multiple HP LED light module, providing two common color temperatures and excellent color rendering configuration, and with a variety of beam Angle options. This product can be used in museums, art galleries, exhibition halls, high-end commercial and residential places.

Product Features

- Body Material: Aluminum alloy die-casting,
Insulated pressure resistant plastic electrical box
- Optical System: lens
 - Finish: Static electricity powder coating (BK and WT).
 - Adjustable Angle: horizontal 0°~355°; vertical 0~90°.
 - Accessories: Up to three optical accessories can be added, and each type of accessories can be installed at most one at the same time.
 - Certification: CCC
 - IP Rating: IP20
 - Insulation Level: Class I
 - Operating Temperature: -20°C~40°C
 - Net Weight: 0.6Kg without packing

Product Specifications

- LED type: High-Power LED
- LED power: 6W(3*2W) or 9W(3*3W)
- Source LM: 3000K: 525lm (6W) / 735lm (9W)
4000K: 555lm (6W) / 777lm (9W)
- LED lifetime: >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K / 4000K , Ra90 or Ra97 (>Ra95)
- SDCM: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: built in dimming (dimming Range 10%~100%) ,
0-10V dimming (must undergo compatibility testing with the project site)

Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
TL25S Swallow II	LD06 LED 6W LD09 LED 9W	O On-boarding D 0-10V	S 7°	9 90 A 97	30 3000K 40 4000K	WT White BK Black
			1 14°			
			2 20°			
			3 30°			
			4 40°			
E 10*30°						
TL25S	LD06	O	2	9	30	WT

Example: TL25SLD06-O-2930WT









SWALLOW II - MODEL: TL25SLD



PROJECT:


TYPE:

Accessory


First class fittings	LENS-16-BEL-C Striped glass lens 	LENS-16-BSL-SW Soft glass lenses 	LENS-16-FR Frosted glass lenses 	LENS-16-HCL The endless bee net grid 
Second class fittings	LENS-16-SNOOT Anti-glare snoot 	LENS-16-CRL Anti-glare cross grille 	LENS-16-HCM Anti-glare bee-net grille 	
Third class fittings	TL-21-BD-SW Four leaf shading board 			

Note: Up to three optical accessories can be added, and each type of accessory can only be added one at a time


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA




MODEL:	TL25SLD06-O-S930
BEAM ANGLE:	7°
POWER:	8W
LUMENS:	374lm
CBCP:	11125cd
EFFICACY:	47lm/W




MODEL:	TL25SLD06-O-1930
BEAM ANGLE:	14°
POWER:	8W
LUMENS:	369lm
CBCP:	3627cd
EFFICACY:	46lm/W




MODEL:	TL25SLD06-O-2930
BEAM ANGLE:	20°
POWER:	8W
LUMENS:	381lm
CBCP:	2542cd
EFFICACY:	48lm/W



MODEL:	TL25SLD06-O-3930
BEAM ANGLE:	30°
POWER:	8W
LUMENS:	367lm
CBCP:	1090cd
EFFICACY:	46lm/W



MODEL:	TL25SLD06-O-4930
BEAM ANGLE:	40°
POWER:	8W
LUMENS:	337lm
CBCP:	682cd
EFFICACY:	42lm/W




MODEL:	TL25SLD06-O-E930
BEAM ANGLE:	10°30'
POWER:	8W
LUMENS:	335lm
CBCP:	2672cd
EFFICACY:	42lm/W

SWALLOW II - MODEL: TL25SLD




PROJECT:


TYPE:




MODEL : TL25SLD09-O-S930
BEAM ANGLE : 7°
POWER : 12W
LUMENS : 491lm
CBCP : 14845cd
EFFICACY : 41lm/W




MODEL : TL25SLD09-O-1930
BEAM ANGLE : 14°
POWER : 12W
LUMENS : 490lm
CBCP : 4851cd
EFFICACY : 41lm/W




MODEL : TL25SLD09-O-2930
BEAM ANGLE : 20°
POWER : 12W
LUMENS : 499lm
CBCP : 3354cd
EFFICACY : 42lm/W



MODEL : TL25SLD09-O-3930
BEAM ANGLE : 30°
POWER : 12W
LUMENS : 485lm
CBCP : 1444cd
EFFICACY : 40lm/W



MODEL : TL25SLD09-O-4930
BEAM ANGLE : 40°
POWER : 12W
LUMENS : 449lm
CBCP : 908cd
EFFICACY : 37lm/W

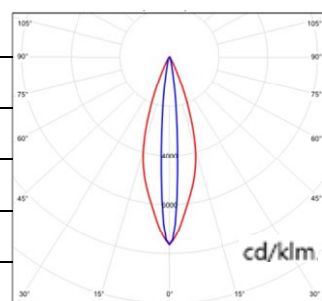

MODEL : TL25SLD09-O-E930
BEAM ANGLE : 10°*30°
POWER : 12W
LUMENS : 468lm
CBCP : 3572cd
EFFICACY : 39lm/W

Note: When the light surface of the luminaire is parallel to the illuminated surface, 10°*30° indicates the transverse stretch spot . .

SWALLOW II - MODEL: TL26SLD

W Track Luminaires




PROJECT:

TYPE:

Product Image



Line Drawing

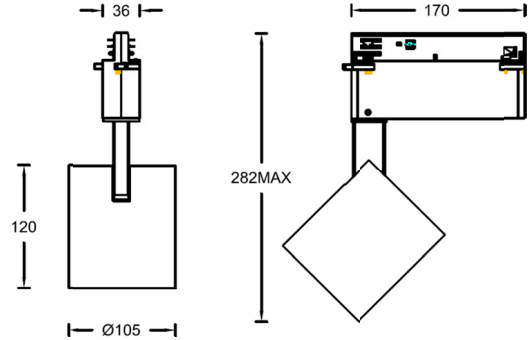

Product Description

Swallow II series LED track spotlights, suitable for W three-loop track, exquisite design, made of aluminum alloy die-cast lamp body, no visible radiator, built-in multiple HP LED light module, providing two common color temperatures and excellent color rendering configuration, and with a variety of beam Angle options. This product can be used in museums, art galleries, exhibition halls, high-end commercial and residential places.

Product Features

- Body Material: Aluminum alloy die-casting, Insulated pressure resistant plastic electrical box
- Optical System: lens
- Finish: Static electricity powder coating (BK and WT).
- Adjustable Angle: horizontal 0°~365°; vertical 0~90°.
- Accessories: Up to three optical accessories can be added, and each type of accessories can be installed at most one at the same time.
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C
- Net Weight: 1.3Kg without packing

Product Specifications

- LED type: High-Power LED
- LED power: 12W(6*2W)、18W(6*3W)、24W(8*3W) or 9W(3*3W)
- Source LM: 3000K: 1050lm (12W) / 1470lm (18W) / 1960lm (24W)
4000K: 1110lm (12W) / 1554lm (18W) / 2072lm (24W)
Note: 5° is only suitable for 9W, 735lm(3000K) / 777lm(4000K)
- LED lifetime: >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K / 4000K , Ra90 or Ra97(>Ra95)
- SDCM: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: built in dimming (dimming Range 10%~100%) , 0-10V dimming (must undergo compatibility testing with the project site)

Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
TL26S Swallow II	LD09 LED 9W	O On-boarding D 0-10V	V 5°	9 90 A 97	30 3000K 40 4000K	WT White BK Black
	LD12 LED 12W		S 7°			
	LD18 LED 18W		1 14°			
	LD24 LED 24W		2 20°			
			3 30°			
	4 40°					
	E 10*30°					
TL26S	LD18	O	2	9	30	WT

Example: TL26SLD18-O-2930WT

WAC Lighting

www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters

44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)

14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

SWALLOW II - MODEL: TL26SLD









W Track Luminaires



PROJECT:







TYPE:

Accessory

First class fittings	LENS-25-BEL-SW Striped glass lens 	LENS-25-BSL Soft glass lenses 	LENS-25-FR - SW Frosted glass lenses 	LENS-25-LCM-SW The endless bee net grid 
Second class fittings	LENS-25-SNOOT-SW Anti-glare snoot 	LENS-25P-CRL-BK Anti-glare plastic cross grille 	LENS-25-HCL Anti-glare bee-net grille 	
Third class fittings	TL-22-BD-SW Four leaf shading board 			

Note: Up to three optical accessories can be added, and each type of accessory can only be added one at a time

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

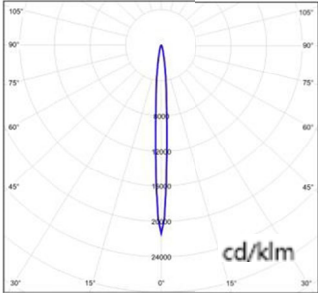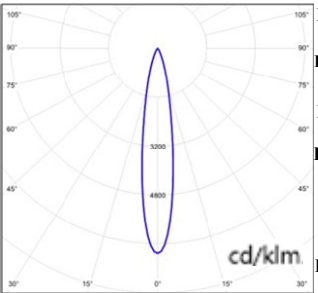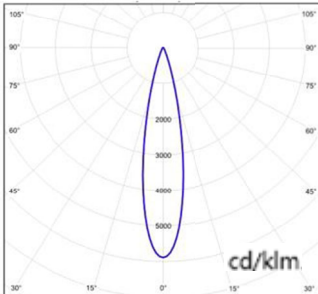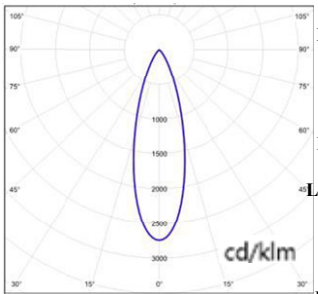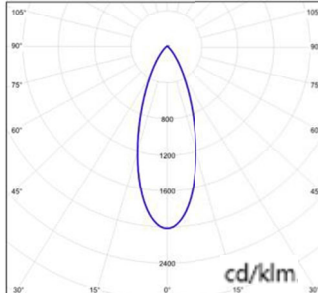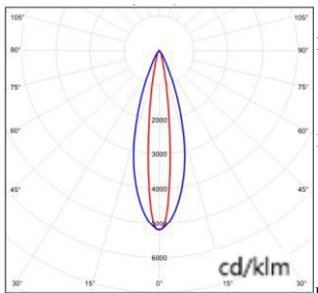	MODEL: TL26SLD12-O-S930		MODEL: TL26SLD12-O-1930
BEAM ANGLE	7°	BEAM ANGLE :	14°
POWER:	15W	POWER:	15W
LUMENS:	604lm	LUMENS	630lm
CBCP:	12921cd	CBCP:	4234cd
EFFICACY: :	40lm/W	EFFICACY:	42lm/W
	MODEL: TL26SLD12-O-2930		MODEL: TL26SLD12-O-3930
BEAM ANGLE	20°	BEAM ANGLE :	30°
POWER:	15W	POWER:	15W
LUMENS:	682lm	LUMENS:	624lm
CBCP:	4016cd	CBCP:	1713cd
EFFICACY: :	45lm/W	EFFICACY:	42lm/W
	MODEL: TL26SLD12-O-4930		MODEL: TL26SLD12-O-E930
BEAM ANGLE	40°	BEAM ANGLE:	10°30°
POWER:	15W	POWER:	15W
LUMENS:	606lm	LUMENS:	598lm
CBCP:	1223cd	CBCP:	3114cd
EFFICACY: :	40lm/W	EFFICACY:	40lm/W

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

SWALLOW II - MODEL: TL26SLD

W Track Luminaires



PROJEC;

TYPE:

	<p>MODEL: TL26SLD18-O-S930</p> <p>BEAM ANGLE : 7°</p> <p>POWER: 21W</p> <p>LUMENS: 843lm</p> <p>CBCP: 18043cd</p> <p>EFFICACY: 40lm/W</p>		<p>MODEL: TL26SLD18-O-1930</p> <p>BEAM ANGLE : 14°</p> <p>POWER: 21W</p> <p>LUMENS: 868lm</p> <p>CBCP: 5876cd</p> <p>EFFICACY: 41lm/W</p>
	<p>MODEL: TL26SLD18-O-2930</p> <p>BEAM ANGLE : 20°</p> <p>POWER: 21W</p> <p>LUMENS: 943lm</p> <p>CBCP: 5587cd</p> <p>EFFICACY: 45lm/W</p>		<p>MODEL: TL26SLD18-O-3930</p> <p>BEAM ANGLE : 30°</p> <p>POWER: 21W</p> <p>LUMENS: 867lm</p> <p>CBCP: 2377cd</p> <p>EFFICACY: 41lm/W</p>
	<p>MODEL: TL26SLD18-O-4930</p> <p>BEAM ANGLE : 40°</p> <p>POWER: 21W</p> <p>LUMENS: 839lm</p> <p>CBCP: 1694cd</p> <p>EFFICACY: 40lm/W</p>		<p>MODEL: TL26SLD18-O-E930</p> <p>BEAM ANGLE : 10°30'</p> <p>POWER: 21W</p> <p>LUMENS: 856lm</p> <p>CBCP: 4528cd</p> <p>EFFICACY: 41lm/W</p>
	<p>MODEL: TL26SLD24-O-S930</p> <p>BEAM ANGLE : 7°</p> <p>POWER: 27W</p> <p>LUMENS: 1244lm</p> <p>CBCP: 36110cd</p> <p>EFFICACY: 46lm/W</p>		<p>MODEL: TL26SLD24-O-1930</p> <p>BEAM ANGLE : 14°</p> <p>POWER: 27W</p> <p>LUMENS: 1191lm</p> <p>CBCP: 9286cd</p> <p>EFFICACY: 44lm/W</p>
	<p>MODEL: TL26SLD24-O-2930</p> <p>BEAM ANGLE : 20°</p> <p>POWER: 27W</p> <p>LUMENS: 1223lm</p> <p>CBCP: 7430cd</p> <p>EFFICACY: 45lm/W</p>		<p>MODEL: TL26SLD24-O-3930</p> <p>BEAM ANGLE : 40°</p> <p>POWER: 27W</p> <p>LUMENS: 1150lm</p> <p>CBCP: 3315cd</p> <p>EFFICACY: 43lm/W</p>


SWALLOW II - MODEL: TL26SLD

W Track Luminaires




PROJEC;


TYPE:



MODEL : TL26SLD24-O-4930
BEAM ANGLE 40°
POWER: 27W
LUMENS: 1129lm
CBCP: 2369cd
EFFICACY: 42lm/W



MODEL : TL26SLD24-O-E930
BEAM ANGLE : 10*30°
POWER: 27W
LUMENS: 1141lm
CBCP: 10664cd
EFFICACY: 42lm/W



MODEL TL26SLD09-O-V930
BEAM ANGLE 5°
POWER: 12W
LUMENS: 488lm
CBCP: 26330cd
EFFICACY: 41lm/W

Note: When the light surface of the luminaire is parallel to the illuminated surface, 10°*30° indicates the transverse stretch spot . .

SWALLOW II - MODEL: TL27SLD

W Track Luminaires

WAC


PROJECT:

TYPE:

Product Image



Line Drawing

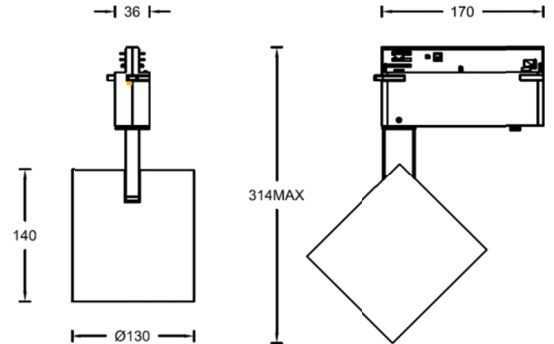

Product Description

Swallow II series LED track spotlights, suitable for W three-loop track, exquisite design, made of aluminum alloy die-cast lamp body, no visible radiator, built-in multiple HP LED light module, providing two common color temperatures and excellent color rendering configuration, and with a variety of beam Angle options. This product can be used in museums, art galleries, exhibition halls, high-end commercial and residential places.

Product Features

- Body Material: Aluminum alloy die-casting,
- Insulated pressure resistant plastic electrical box
- Optical System: lens
- Finish: Static electricity powder coating (BK and WT).
- Adjustable Angle: horizontal 0°~365°; vertical 0~90°.
- Accessories: Up to three optical accessories can be added, and each type of accessories can be installed at most one at the same time.
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C
- Net Weight: 2.1g without packing

Product Specifications

- LED type: High-Power LED
- LED power : 30W(15*2W) 、 36W(12*3W) 、 45W(15*3W) 或 15W(5*3W)
- Source LM: 3000K: 2625lm (30W) / 2940lm (36W) / 3675lm (45W)
4000K: 2775lm (30W) / 3108lm (36W) / 3885lm (45W)
注: 5°只适合 15W, 1225lm(3000K) / 1295lm(4000K)
- LED lifetime: >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K / 4000K , 可选Ra90或Ra97(>Ra95)
- SDCM: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: built in dimming (dimming Range 10%~100%) 、 0-10V dimming (must undergo compatibility)

Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
TL27S Swallow II	LD15 LED 15W	O On-boarding D 0-10V	V 5°	9 90 A 97	30 3000K 40 4000K	WT White BK Black
	LD30 LED 30W		S 7°			
	LD36 LED 36W		1 14°			
	LD45 LED 45W		2 20°			
			3 30°			
	4 40°					
			E 10*30°			
TL27S	LD36	O	2	9	30	WT

Example: TL27SLD36-O-2930WT

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598







WAC Lighting reserves the right to periodically design and update products.2024-01-31

SWALLOW II - MODEL: TL27SLD

W Track Luminaires

PROJECT:

Accessory

First class fittings	LENS-111-BEL-SW Striped glass lenses 	LENS-111-BSL Soft glass lenses 	LENS-111-FR Frosted glass lenses 
Second class fittings	LENS-111-SNOOT Anti-glare snoot 	LENS-111-CRL-C Anti-glare plastic cross grille 	LENS-111-... Anti-glare...
Third class fittings	TL-23-BD-SW Four leaf shading board 		

Note: Up to three optical accessories can be added, and each type of accessory can only be added one at a time

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

