

LIGNE PRO - MODEL: LLBPX-LD50D

Linear Luminaires

WAC


PROJECT:

TYPE:

Product Image



Line Drawing

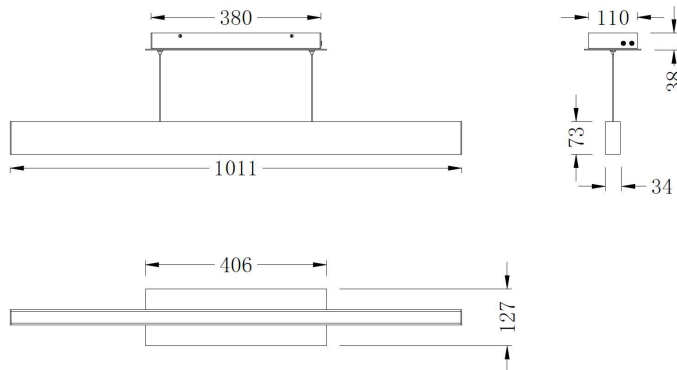

Product Description

LIGNE Pro pendant light, with a large angle bat wing light distribution for the upper light output and anti glare surface illumination for the lower light output. The single light can be independently adjusted with a knob for dimming. Suitable for lighting applications in commercial, office, and conference spaces.

Product Features

- Body Material: Al alloy extruded lamp body
- Optical System: Lens+SUBROSA hidden light system
- Finish: Static electricity powder coating
- Projection direction: /
- Accessories/Brackets: /
- Certification: CQC
- IP Rating: IP20
- Insulation Level: Class III
- Operating Temperature: -20°C~40°C

Product Specifications

- LED Type: SMD LED
- Light block angle: /
- Source Lm: 3000K 6000lm; 4000K 6500lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K, 4000K, Ra90
- SDCM: 3 SDCM
- Input: 220V-240V AC/50Hz
- Dimming: 0-10V; Comes with a knob for dimming
- Net Weight: 2.3Kg without packing

Order Model

Model	LED Power	Beam	Driver	Reflector	CCT	Finish
LLBPX Linear pendants B Series X Size	LD50 50W	9 90°	D 0-10V DIMMING	P Panel	30 3000K 40 4000K	WT White BK Black

Example: LLBPX-LD50D-309PWT

Accessories

/

LIGNE PRO - MODEL: LLBPX-LD50D


Linear Luminaires

WAC


PROJECT:

TYPE:

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



MODEL :	LLBPX-LD50D-309PWT
BEAM ANGLE :	90°
POWER:	30 W
LUMENS:	2204 lm
CBCP:	1309 cd
EFFICACY:	74 lm/W



MODEL :	LLBPX-LD50D-309PWT
BEAM ANGLE :	130°
POWER:	30 W
LUMENS:	2305 lm
CBCP:	1907 cd
EFFICACY:	78 lm/W