

FUEGO COMPACT - MODEL: EIR5TF

In-ground Luminaires

WAC


PROJECT:

TYPE:

Product Image



Line Drawing

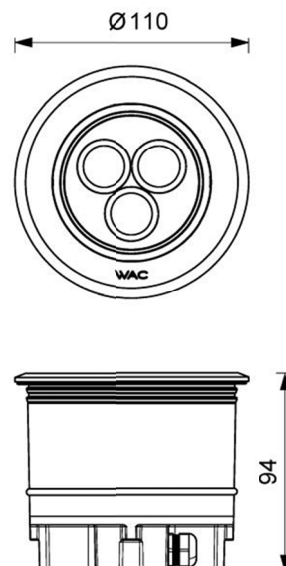

Product Description

The FUEGO Compact face frame is made of high-quality stainless steel, with the lamp body made of aluminum die-casting and high-temperature powder spraying, suitable for outdoor environments. It has an IP67 protection level and an IK08 impact resistance level, and can withstand pressure of 2000kg. Cooperate with the design of the embedded cylinder to facilitate customer installation and maintenance. High transmittance lens, applied in residential areas, squares, parks, shopping centers, sculpture decoration lighting, etc.

Product Features

- Body Material: Stainless steel frame+ aluminum die-casting lamp body
- Optical System: Lens
- Finish: Electrostatic powder coating
- Adjustable Angle: /
- Accessories: Embedded cylinder
- Certification: CCC
- IP Rating: IP67,IK08
- Insulation Level: Class I
- Operating Temperature: -20°C~50°C

Product Specifications

- LED Type: High Power LED
- LED Power: 6.3W Max
- Source Lm: 3000K 660lm;
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K/ 3000K/4000K, Ra80
- SDCM: 3 SDCM
- Input: 220V AC / 50Hz
- Dimming: On-off
- Net Weight: 0.7Kg without packing

Order Model

Model	Comment	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	CCT	Finish
EIR5T						S 6°	27 2700K	SS
High Lumens	F Fixed	06 6W(Max)	3	455	EL ON-OFF 220V AC Power Supply	1 13° 2 20° 3 30°	30 3000K 40 4000K	Stainless Steel

Example: EIR5TF-06EL-127SS

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14, Lane 299, Bi Sheng Road, Shanghai 201204, China
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting reserves the right to periodically design and update products. 2024-01-29

FUEGO COMPACT - MODEL: EIR5TF

In-ground Luminaires



PROJECT:

TYPE:


Model	Comment	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	CCT	Finish
EIR5T High Lumens	F Fixed	05 5W(Max)	3	380	ML DMX512 Dimming 220V AC Power Supply	S 6° 1 13° 2 20° 3 30°	27 2700K 30 3000K 40 4000K	SS Stainless Steel

Example : EIR5TF-05ML-127SS


Accessories

Item	Description	Pic	Description Dimensions
EIR5TF-RC001	Recessed Casing		


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

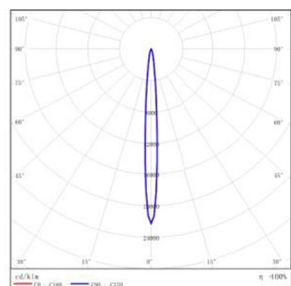


MODEL: EIR5TF-06EL-S30SS
BEAM ANGLE: 6.4°
POWER: 8.3W
LUMENS: 451 lm
CBCP: /
EFFICACY: 54 lm /W

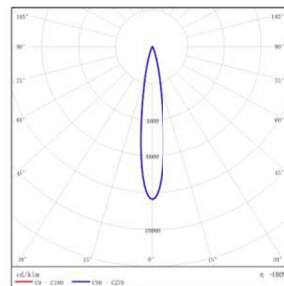

MODEL: EIR5TF-06EL-130SS
BEAM ANGLE: 13.5°
POWER: 8.3W
LUMENS: 455.4 lm
CBCP: /
EFFICACY: 55 lm /W

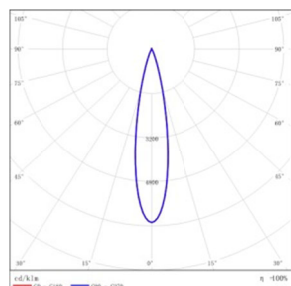

MODEL: EIR5TF-06EL-230SS
BEAM ANGLE: 20.1°
POWER: 8.3W
LUMENS: 439 lm
CBCP: /
EFFICACY: 53 lm /W

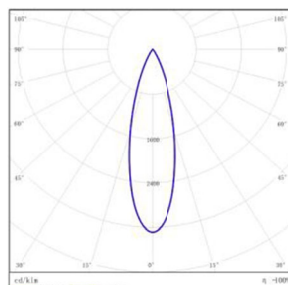

MODEL: EIR5TF-06EL-330SS
BEAM ANGLE: 29.8°
POWER: 8.3 W
LUMENS: 429 lm
CBCP: /
EFFICACY: 52 lm /W

WAC Lighting
 www.waclighting.com (US)
 www.waclighting.com.cn (China)

Headquarters
 44 Harbor Park Drive • Port Washington, NY
 Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
 14,Lane 299, Bi Sheng Road, Shanghai 201204,China
 Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

FUEGO COMPACT - MODEL: EIR6TF

In-ground Luminaires

WAC


PROJECT:

TYPE:

Product Image



Line Drawing

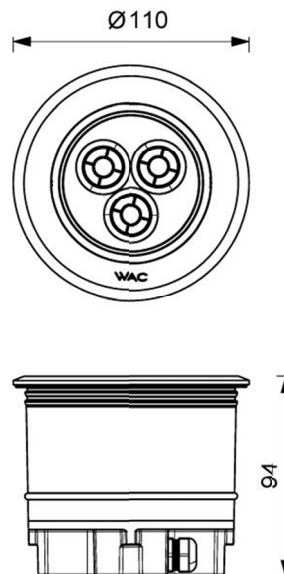

Product Description

The FUEGO Compact face frame is made of high-quality stainless steel, with the lamp body made of aluminum die-casting and high-temperature powder spraying, suitable for outdoor environments. It has an IP67 protection level and an IK08 impact resistance level, and can withstand pressure of 2000kg. Cooperate with the design of the embedded cylinder to facilitate customer installation and maintenance. Super anti glare lens, applied in residential areas, squares, parks, shopping centers, sculpture decoration lighting, etc.

Product Features

- Body Material: Stainless steel frame+ aluminum die-casting lamp body
- Optical System: Lens
- Finish: Electrostatic powder coating
- Adjustable Angle: /
- Accessories: Embedded cylinder
- Certification: CCC
- IP Rating: IP67,IK08
- Insulation Level: Class I
- Operating Temperature: -20°C~50°C

Product Specifications

- LED Type: High Power LED
- LED Power: 6.3W Max
- Source Lm: 3000K 660lm;
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K/ 3000K/4000K, Ra80
- SDCM: 3 SDCM
- Input: 220V AC / 50Hz
- Dimming: On-off
- Net Weight: 0.7Kg without packing

Order Model

Model	Comment	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	CCT	Finish
EIR6T Super Comfort	F Fixed	06 6W(Max)	3	349	EL ON-OFF 220V AC Power Supply	S 6° 1 13° 2 20° 3 30°	27 2700K 30 3000K 40 4000K	SS Stainless Steel

Example: EIR6TF-06EL-127SS

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14, Lane 299, Bi Sheng Road, Shanghai 201204, China
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting reserves the right to periodically design and update products.2024-01-29

FUEGO COMPACT - MODEL: EIR6TF

In-ground Luminaires



PROJECT:

TYPE:


Model	Comment	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	CCT	Finish
EIR6T Super Comfort	F Fixed	05 5W(Max)	3	291	ML DMX512 Dimming 220V AC Power Supply	S 6°	27 2700K 30 3000K 40 4000K	SS Stainless Steel
						1 13°		
						2 20°		
						3 30°		

Example: EIR6TF-05ML-127SS


Accessories

Item	Description	Pic	Description Dimensions
EIR5TF-RC001	Recessed Casing		


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

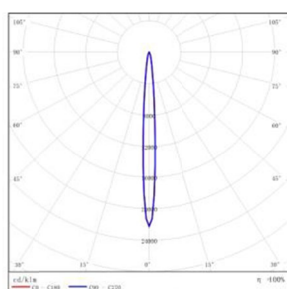


MODEL:	EIR6TF-06EL-S30SS
BEAM ANGLE:	6°
POWER:	8.3W
LUMENS:	349 lm
CBCP:	/
EFFICACY:	42 lm /W

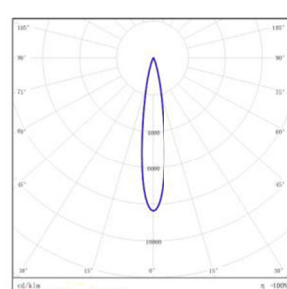

MODEL:	EIR6TF-06EL-130SS
BEAM ANGLE:	12.6°
POWER:	8.3W
LUMENS:	281 lm
CBCP:	/
EFFICACY:	33.5 lm /W

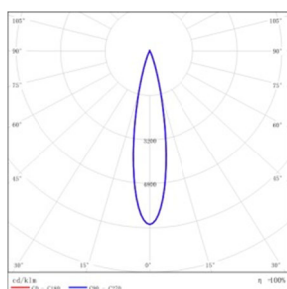

MODEL:	EIR6TF-06EL-230SS
BEAM ANGLE:	18.8°
POWER:	8.3W
LUMENS:	231 lm
CBCP:	/
EFFICACY:	33.5 lm /W

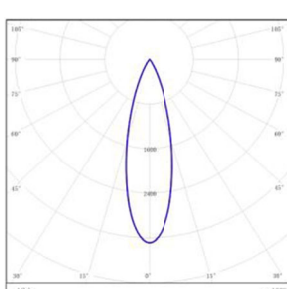

MODEL:	EIR6TF-06EL-330SS
BEAM ANGLE:	28.4°
POWER:	8.3 W
LUMENS:	291 lm
CBCP:	/
EFFICACY:	35 lm /W

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14, Lane 299, Bi Sheng Road, Shanghai 201204, China
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598