

UNIVERSAL LIGHT PANEL - MODEL: OGR20211

Panel Luminaires



WAC

PROJECT:

TYPE:

Product Image

Line Drawing

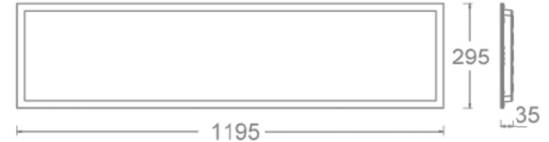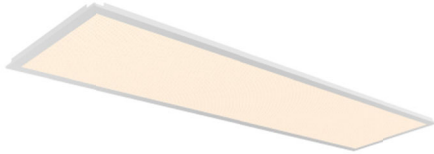

Product Description

WAC universal lamp panel, using aluminum profile lamp body, has a simple and beautiful appearance, and has good heat dissipation performance. Using anti glare prism optics, no visible glare, UGR less than 19, with good anti glare performance and light uniformity. Using LED light source color consistency control, Ra90, no flicker, high light efficiency and energy saving. It has a comfortable lighting effect and is suitable for lighting applications in commercial, office, classroom, and other places.

Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens+Prism Plate
- Finish: Static electricity powder coating
- Adjustable Angle: /
- Accessories/brackets: /
- Certification: CCC
- IP Rating: IP40
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C

Product Specifications

- Shield angle: /
- LED Type: SMD LED
- Light tolerance: 5 SDCM
- Source Lm: 3000K:36W 4680lm;40W 5200lm;48W 6240lm
4000K:36W 4860lm;40W 5400lm;48W 6480lm
5000K:36W 4860lm;40W 5400lm;48W 6480lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/4000K/5000K/Ra90
- Input: 220V~240V AC/50Hz
- Dimming: ON-OFF/0-10V (It is necessary to conduct matching testing with the project site system in advance)
- Net Weight: 2.2Kg without packing

Order Model

Model	Size (mm)	Power (W)	Driver	Beam Down	CCT	Finish
OGR2	0211 295*1195mm	36 36W	E ON-OFF	Y (Prism Plate)	30 3000k	WT White
		40 40W	D 0-10V Dimming		40 4000k	
		48 48W			50 5000k	

Example: OGR20211-36E-Y40WT

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14,Lane 299, Bi Sheng Road, Shanghai 201204,China
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting reserves the right to periodically design and update products.2024-03-06

UNIVERSAL LIGHT PANEL - MODEL: OGR20211


Panel Luminaires

WAC


PROJECT:

TYPE:


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

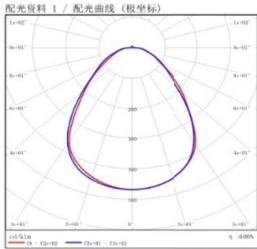

MODEL: OGR20211-36E-Y40WT
BEAM ANGLE: /
POWER: 37.99W
LUMENS: 4451.2lm
CBCP: /
EFFICACY: 117.16lm/W



MODEL: OGR20211-40E-Y40WT
BEAM ANGLE: /
POWER: 42.9W
LUMENS: 4830.6lm
CBCP: /
EFFICACY: 112.52lm/W

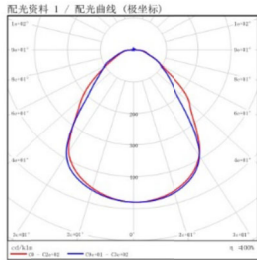

MODEL: OGR20211-48E-Y40WT
BEAM ANGLE: /
POWER: 49.52W
LUMENS: 5481.1lm
CBCP: /
EFFICACY: 110.67lm/W